







Model(型號): DSV01-□□RE/Bu/Ba



Features:

Lowest contact resistance less than 50mΩ;  
 Gold-plated contact provides high reliability;  
 All materials are UL 94V0 grade, high temperature resistant plastic.

Dimensions(規格圖):

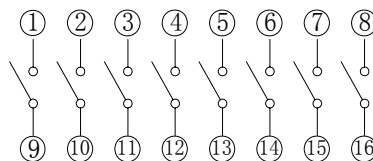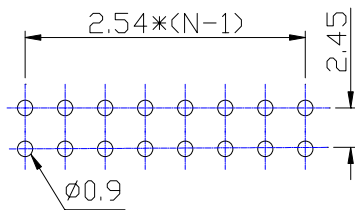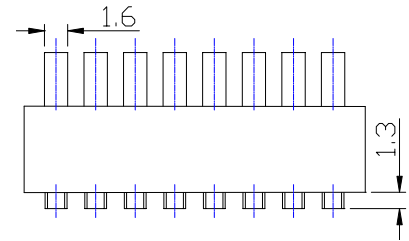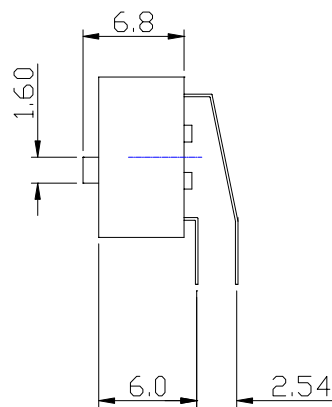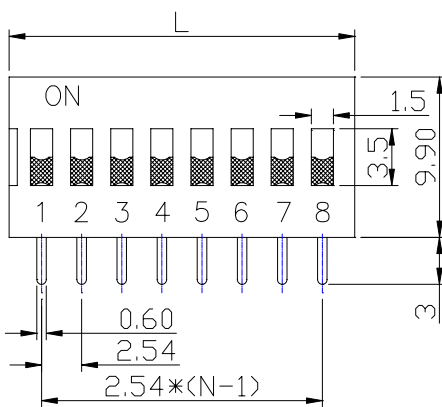

[ Schematic ]

| PRAT NO.     | POSITIONS | L/mm  |
|--------------|-----------|-------|
| DSV01-02 ↓ ↓ | 2         | 6.54  |
| DSV01-03 ↓ ↓ | 3         | 9.18  |
| DSV01-04 ↓ ↓ | 4         | 11.72 |
| DSV01-05 ↓ ↓ | 5         | 14.26 |
| DSV01-06 ↓ ↓ | 6         | 16.80 |
| DSV01-07 ↓ ↓ | 7         | 19.34 |
| DSV01-08 ↓ ↓ | 8         | 21.88 |
| DSV01-10 ↓ ↓ | 10        | 26.96 |

Specifications(規格)

Electrical Characteristics [ 電氣性能 ]

|                                |   |
|--------------------------------|---|
| Rated Power [ 額定功率 ]           | DC24V 25mA                                      |
| Positions [ 位數 ]               | □2 □3 □4 □5 □6 □7 □8 □10                        |
| Contact resistance [ 接觸阻抗 ]    | 50mΩ Max at initial ; 100mΩ Max after life test |
| Insulation resistance [ 絕緣阻抗 ] | 100MΩ Min at DC500V                             |
| Dielectric strength [ 耐電壓 ]    | 1 minute at AC 500V                             |

Mechanical Characteristics [ 機械性能 ]

|  |              |
|--|--------------|
| Circuit [ 開關形式 ]                       | SPST         |
| Operation force [ 動作力 ]                | 1Kgf.cm Max. |
| Travel [ 開關行程 ]                        | 2mm          |
| Operating Temperature Range [ 工作溫度範圍 ] | -30°C~85°C   |
| Storage Temperature Range [ 儲存溫度範圍 ]   | -40°C~85°C   |

Endurance Characteristics [ 耐久性能 ]

|                          |                   |
|--------------------------|-------------------|
| Mechanical life [ 機械壽命 ] | 2,000 Cycles Min. |
|--------------------------|-------------------|