







Model(型號): DSV02-□□RE/Bu/Ba



## Features:

Lowest contact resistance less than 50mΩ;  
 Gold-plated contact provides high reliability;  
 All materials are UL 94V0 grade, high temperature resistant plastic.

## Dimensions(規格圖):

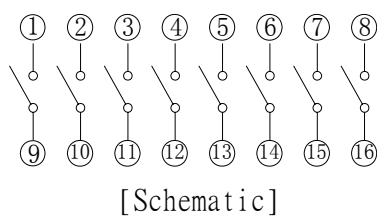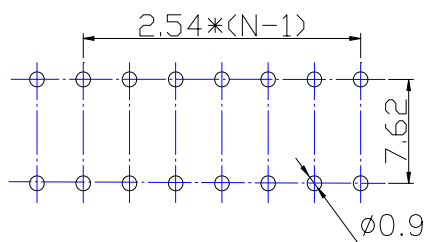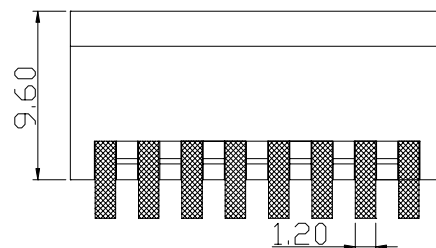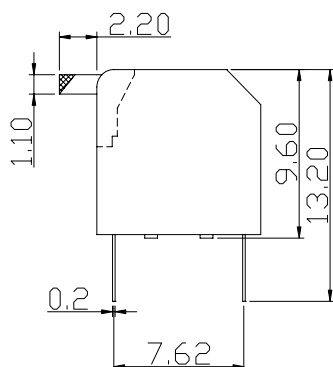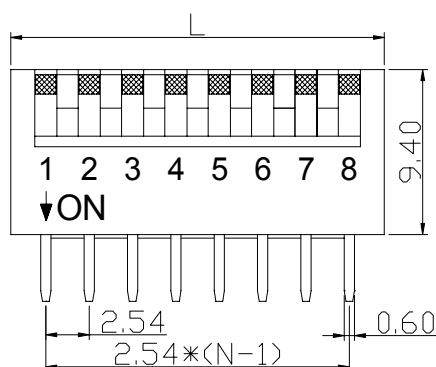

PRAT NO.	POSITIONS	L/mm
DSV02-02 ↓ ↓	2	6.64
DSV02-03 ↓ ↓	3	9.18
DSV02-04 ↓ ↓	4	11.72
DSV02-05 ↓ ↓	5	14.26
DSV02-06 ↓ ↓	6	16.80
DSV02-07 ↓ ↓	7	19.34
DSV02-08 ↓ ↓	8	21.88
DSV02-10 ↓ ↓	10	26.96

## Specifications(規格)

## Electrical Characteristics [ 電氣性能 ]

Rated Power [ 額定功率 ]	DC24V 25mA
Positions [ 位數 ]	<input type="checkbox"/> 2 <input type="checkbox"/> 3 <input type="checkbox"/> 4 <input type="checkbox"/> 5 <input type="checkbox"/> 6 <input type="checkbox"/> 7 <input type="checkbox"/> 8 <input type="checkbox"/> 10
Contact resistance [ 接觸阻抗 ]	50mΩ Max at initial ; 100mΩ Max after life test
Insulation resistance [ 絕緣阻抗 ]	100MΩ Min at DC500V
Dielectric strength [ 耐電壓 ]	1 minute at AC 500V

## Mechanical Characteristics [ 機械性能 ]

Circuit [ 開關形式 ]	SPST
Operation force [ 動作力 ]	1Kgf.cm Max.
Travel [ 開關行程 ]	2mm
Operating Temperature Range [ 工作溫度範圍 ]	-30°C~85°C
Storage Temperature Range [ 儲存溫度範圍 ]	-40°C~85°C

## Endurance Characteristics [ 耐久性能 ]

Mechanical life [ 機械壽命 ]	2,000 Cycles Min.
--------------------------	-------------------