






Model(型號): DSVS3-□□Ba

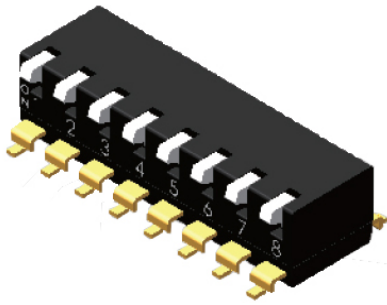

## Features:

Lowest contact resistance less than 50mΩ;  
 Gold-plated contact provides high reliability;  
 All materials are UL 94V0 grade, high temperature resistant plastic.

## Dimensions(規格圖):

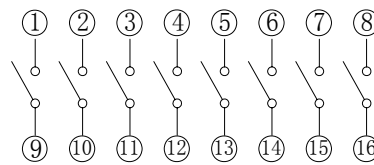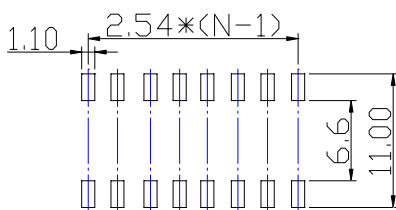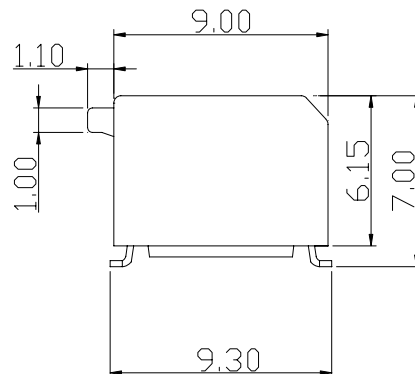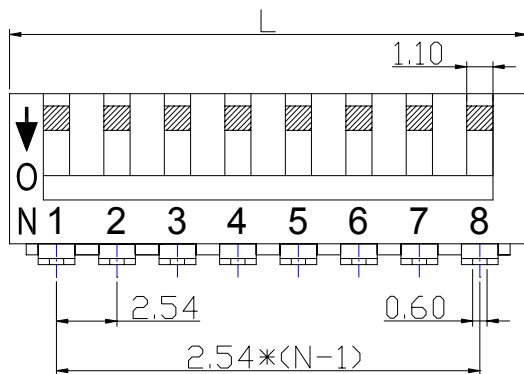

[Schematic]

PRAT NO.	POSITIONS	L/mm
DSVS3-02Ba	2	6.48
DSVS3-03Ba	3	9.02
DSVS3-04Ba	4	11.56
DSVS3-05Ba	5	14.10
DSVS3-06Ba	6	16.64
DSVS3-07Ba	7	19.18
DSVS3-08Ba	8	21.72
DSVS3-10Ba	10	26.80

## Specifications(規格)

## Electrical Characteristics [電氣性能]

Rated Power [額定功率]	DC24V 25mA
Positions [位數]	<input type="checkbox"/> 2 <input type="checkbox"/> 3 <input type="checkbox"/> 4 <input type="checkbox"/> 5 <input type="checkbox"/> 6 <input type="checkbox"/> 7 <input type="checkbox"/> 8 <input type="checkbox"/> 10
Contact resistance [接觸阻抗]	50mΩ Max at initial ; 100mΩ Max after life test
Insulation resistance [絕緣阻抗]	100MΩ Min at DC500V
Dielectric strength [耐電壓]	1 minute at AC 500V

## Mechanical Characteristics [機械性能]

Circuit [開關形式]	SPST
Operation force [動作力]	1Kgf.cm Max.
Travel [開關行程]	2mm
Operating Temperature Range [工作溫度範圍]	-30°C~85°C
Storage Temperature Range [儲存溫度範圍]	-40°C~85°C

## Endurance Characteristics [耐久性能]

Mechanical life [機械壽命]	2,000 Cycles Min.
------------------------	-------------------