






Model(型號): DSHS2-□□Ba

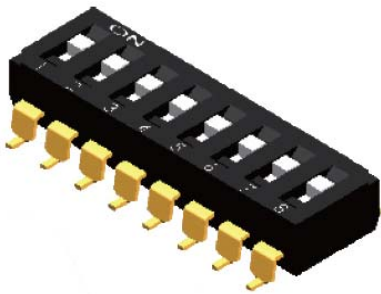

Features:

Lowest contact resistance less than 50mΩ;
 Gold-plated contact provides high reliability;
 All materials are UL 94V0 grade, high temperature resistant plastic.

Dimensions(規格圖):

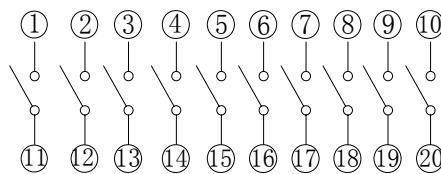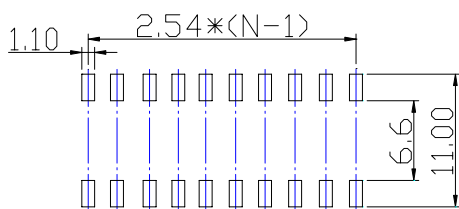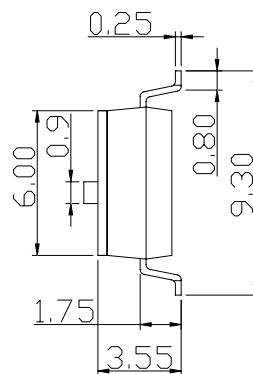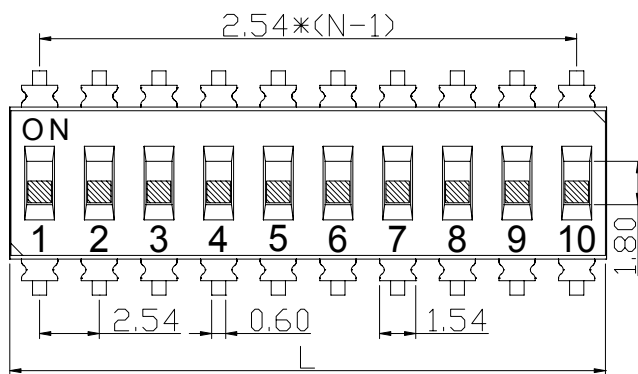

[Schematic]

PRAT NO.	POSITIONS	L/mm
DSHS2-01Ba	1	2.54
DSHS2-02Ba	2	5.08
DSHS2-03Ba	3	7.62
DSHS2-04Ba	4	10.16
DSHS2-05Ba	5	12.70
DSHS2-06Ba	6	15.24
DSHS2-07Ba	7	17.78
DSHS2-08Ba	8	20.32
DSHS2-09Ba	9	22.86
DSHS2-10Ba	10	25.40

Specifications(規格)

Electrical Characteristics [電氣性能]

Rated Power [額定功率]	DC24V 25mA
Positions [位數]	<input type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3 <input type="checkbox"/> 4 <input type="checkbox"/> 5 <input type="checkbox"/> 6 <input type="checkbox"/> 7 <input type="checkbox"/> 8 <input type="checkbox"/> 9 <input type="checkbox"/> 10
Contact resistance [接觸阻抗]	50mΩ Max at initial ; 100mΩ Max after life test
Insulation resistance [絕緣阻抗]	100MΩ Min at DC500V
Dielectric strength [耐電壓]	1 minute at AC 500V

Mechanical Characteristics [機械性能]

Circuit [開關形式]	SPST
Operation force [動作力]	1Kgf.cm Max.
Travel [開關行程]	2mm
Operating Temperature Range [工作溫度範圍]	-30°C~85°C
Storage Temperature Range [儲存溫度範圍]	-40°C~85°C

Endurance Characteristics [耐久性能]

Mechanical life [機械壽命]	2,000 Cycles Min.
------------------------	-------------------