



Model(型號): DSHS1-□□Ba





Features:

Hyper-miniature DIP Switch, surfaced mount device base on 1.27 mm pitch;
 Lowest contact resistance less than 50mΩ;
 Gold-plated contact provides high reliability;
 All materials are UL 94V0 grade, high temperature resistant plastic.

Dimensions(規格圖):

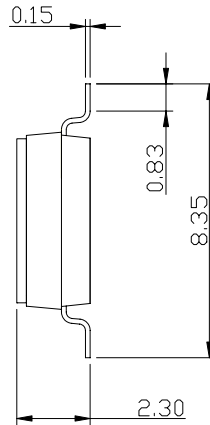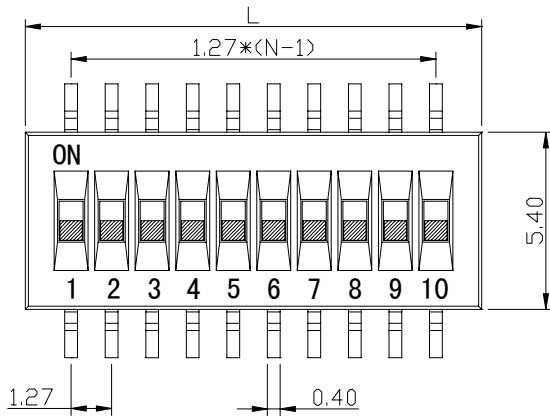

PRAT NO.	POSITIONS	L/mm
DSHS1 -02Ba	2	4.12
DSHS1 -04Ba	4	6.66
DSHS1 -06Ba	6	9.20
DSHS1 -08Ba	8	11.74
DSHS1 -10Ba	10	14.28

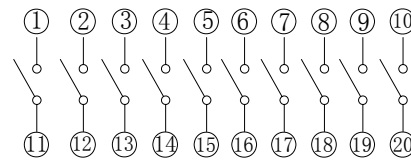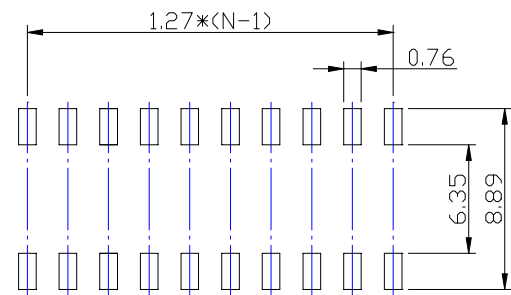

[Schematic]

Specifications(規格)

Electrical Characteristics [電氣性能]

Rated Power [額定功率]	DC24V 25mA
Positions [位數]	<input type="checkbox"/> 2 <input type="checkbox"/> 4 <input type="checkbox"/> 6 <input type="checkbox"/> 8 <input type="checkbox"/> 10
Contact resistance [接觸阻抗]	50mΩ Max at initial ; 100mΩ Max after life test
Insulation resistance [絕緣阻抗]	100MΩ Min at DC100V
Dielectric strength [耐電壓]	1 minute at AC 300V

Mechanical Characteristics [機械性能]

Circuit [開關形式]	SPST
Operation force [動作力]	1Kgf.cm Max.
Travel [開關行程]	2mm
Operating Temperature Range [工作溫度範圍]	-30°C~85°C
Storage Temperature Range [儲存溫度範圍]	-40°C~85°C

Endurance Characteristics [耐久性能]

Mechanical life [機械壽命]	2,000 Cycles Min.
------------------------	-------------------