


Model(型號): S ■ ■ 6NA01

Features:


Excellent operational feeling; Clear click feeling for heat controllers
Smooth and wet slide feeling for electronic musical instruments Low noise.

特點:

具有良好的滑動手感和清晰的中點感覺，滑動雜音低，適於調聲音。

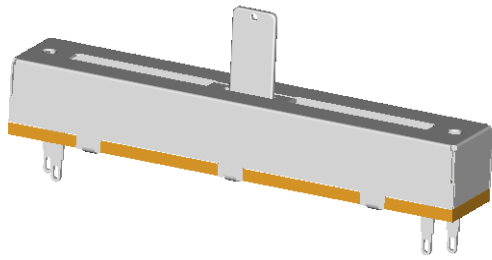

Dimensions(規格圖):

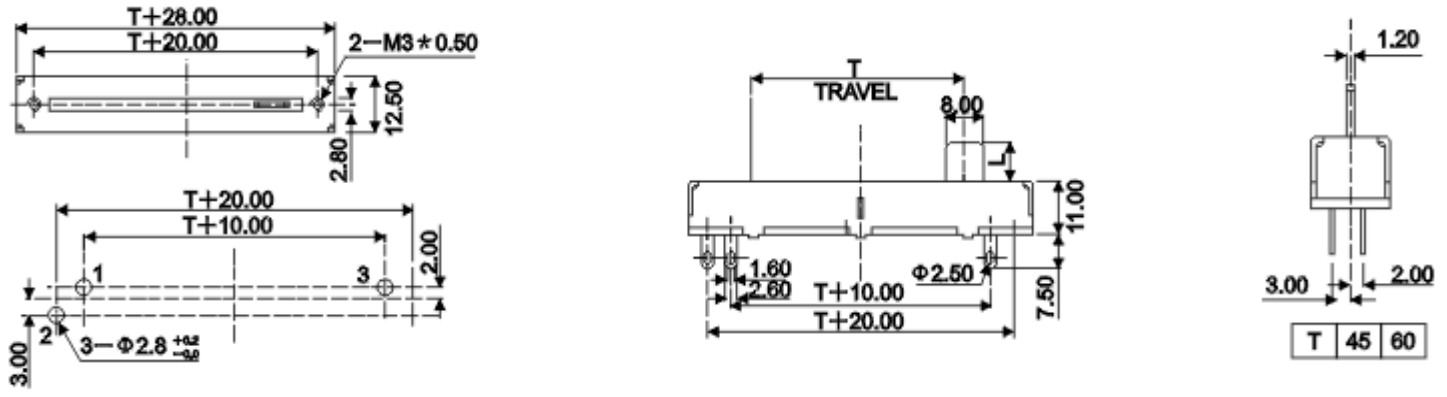

| | | C TAPE | | | | | | V TAPE | | | | E TAPE | | | | R TAPE | | | | | | H TAPE | | | | | | | | |
|------------|---|--------|----|------|----|----|----|--------|----|----|----|--------|---|---|---|--------|----|---|-----|----|----|--------|----|----|---|----|----|----|----|----|
| DIMENSIONS | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | L | 5 | 10 | 12.5 | 15 | 18 | 20 | L | 10 | 15 | 20 | 25 | L | 7 | 8 | 10 | 25 | L | 8.5 | 10 | 15 | 20 | 25 | 27 | L | 10 | 15 | 20 | 21 | 25 |
| | F | 0 | 5 | 5 | 5 | 5 | 5 | F | 7 | 10 | 10 | 10 | | | | | | F | 5 | 5 | 10 | 10 | 10 | 10 | F | 7 | 10 | 10 | 10 | 10 |
| | | | | | | | | | | | | | | | | | | | | | | | | | M | 6 | 7 | 7 | 7 | 7 |

Specifications(規格)

Electrical Characteristics [電氣性能]

| | |
|--|-----------------------|
| Total resistance [全阻抗值] | 100Ω - 1MΩ |
| Total resistance tolerance [全阻抗值容許差] | ±20% |
| Ratings power(w) [額定功率] | 45mm 0.25W 60mm 0.50W |
| Resistance taper [阻抗變化特性] | A B C D |
| Residual resistance[残留阻值] | 20Ω |
| Sliding noise[滑動雜音] | 100mV |
| Withstanding voltage[耐電壓] | 1 minute at AC 300V |
| Max. operation voltage [最高使用電壓] | 45mm 350V 60mm 500V |

Mechanical Characteristics [機械性能]

| | |
|------------------------------------|-------------|
| Peration torque [滑動力矩] | 30~250gf.cm |
| Click slip out torque[掣子脫出力矩] | 40~350gf.cm |
| Rotation stopper strength [止動強度] | 5Kgf.cm |

Endurance Characteristics [耐久性能]

| | |
|--------------------------|--------------|
| Rotational life [回轉壽命] | 10000 cycles |
|--------------------------|--------------|